


Single Top Mount Valve Water Softener / 1"-3" Connection Fiberglass

UDCWC series #	Dimensions in Inches				
	A	B	C	D	H
1354	13	54	18	40	61*
1465	14	65	18	40	72*
1665	16	65	18	40	72*
2254	22	54	24	51	61
2472	24	71	24	54	78

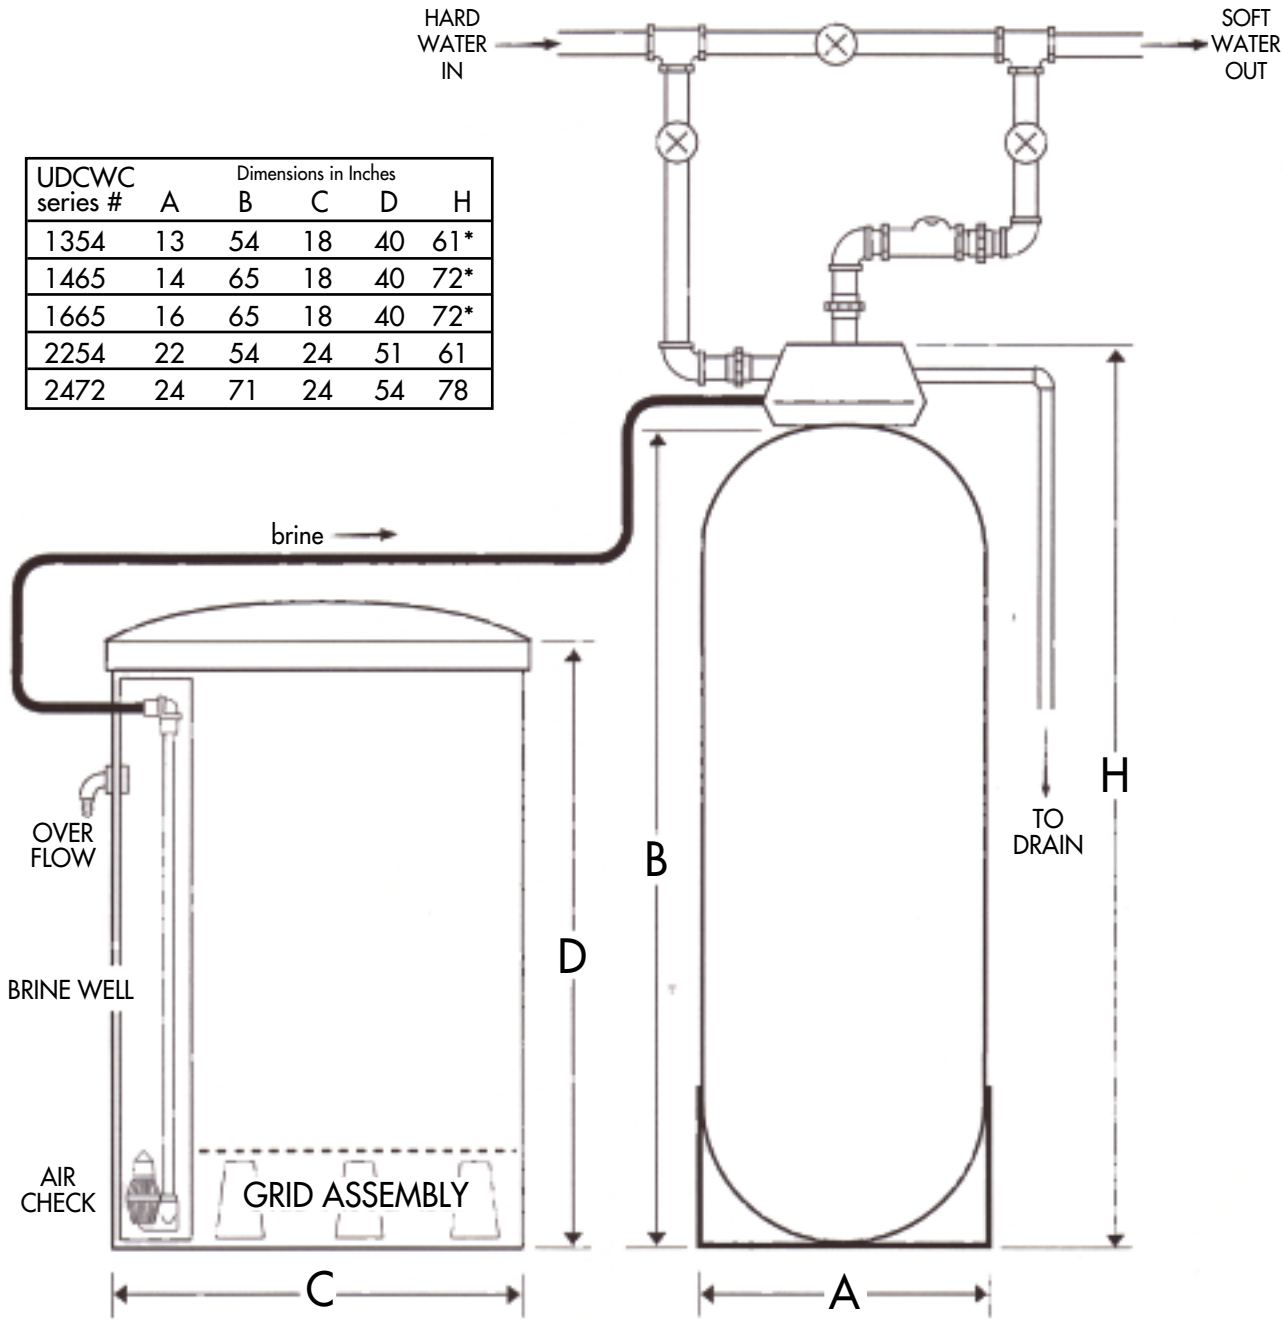

NOTE:
 If possible, allow 24" clearance above softener for access.
 120VAC, 20 AMP electrical service required 6 feet from softener.
 3 valve bypass provided by other unless noted.
 Bypass location will vary from site to site.
 Drain for regeneration required.
 * = Lower Distributor - Slack Basket.
 Softener will bypass hard water during regeneration.

UNITED DISTRIBUTORS INC.	
3 SINGLE TANK / 1"-3" CONNECTION TOP MOUNT VALVE WATER SOFTENER	
FIBERGLASS	
For:	Date: / /